


IMPORTANT:

Manufacturer is not responsible for negligent use of vehicle with Skid Plate Installed, Including over-tightening of screws and bolts causing damage to vehicle or skid plate.

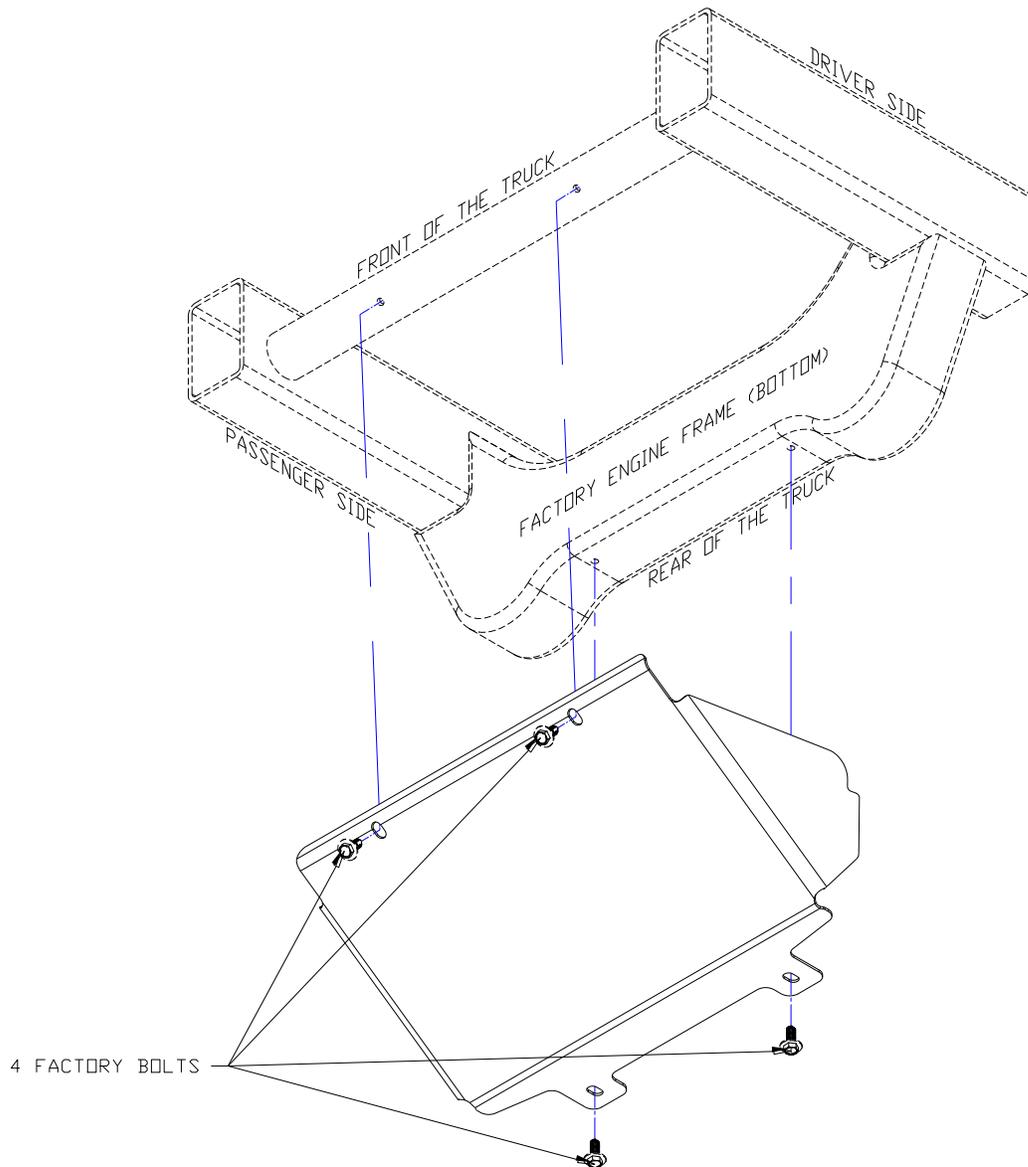

INSTALLATION INSTRUCTIONS:

1. Loosen the four (4) Factory Bolts underneath the Engine and remove the Factory Plastic Skid Plate.
2. Now install the Aluminum Skid Plate in its place using the four (4) Factory Bolts and tighten.

(Check Bolts occasionally to insure they remain tight)