


IMPORTANT:

The manufacturer is not responsible for negligent use of vehicle with mud flaps installed, including over-tightening of screws and bolts causing damage to vehicle or mud flaps.

TOOLS REQUIRED

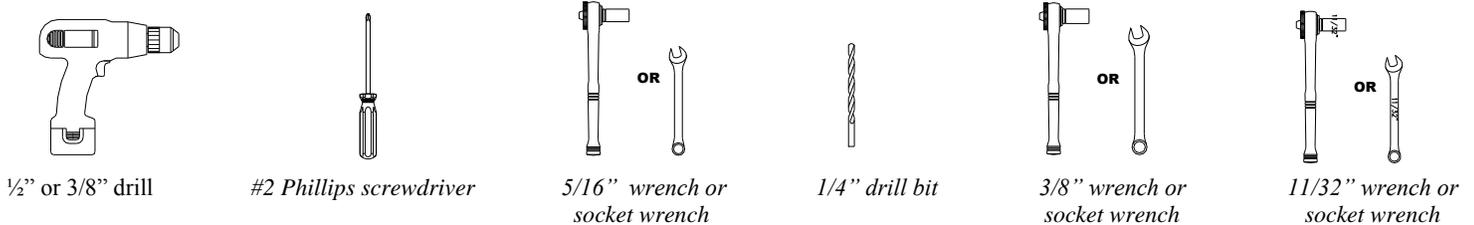

KIT CONTAINS: PARTS BAG #755135

- a) (1) Mount Bracket, Rear, LH Part #755107 
- b) (1) Mount Bracket, Rear, RH Part #755108 
- c) (6) Machine Screw #8-32 x 7/8" Part #012025 
- d) (6) Flat Washer 0.188" x 0.781" Part #018018 
- e) (6) Nylock Nut #8-32 Part #025005 
- f) (4) Machine Screw #10-24 x 1" Part #012022 
- g) (4) Hex Nut #10-24 Part #025003 
- h) (4) Lock Washer #10 Part #024001 
- i) (4) Flat Washer 0.203" x 1" Part #018031 
- j) (4) Half Washer 0.203" x 1" Part #018032 

INSTALLATION

For ease of installation, it is suggested that the wheel be removed.

1. Fasten the LH mount bracket to the left hand flap with 3 machine screws / small washers and nylock nuts to Holes #1, #2 and #3 or if you prefer the flap mounted higher and farther away from the ground then use Holes #4, #5 and #6. *See Diagram #1.*


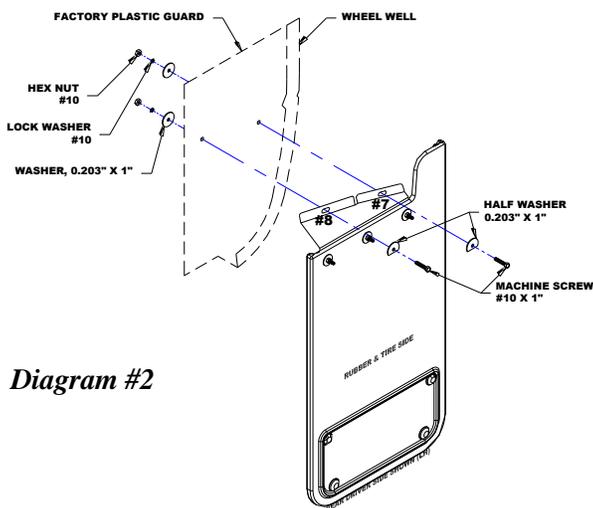


Diagram #2

Diagram #1

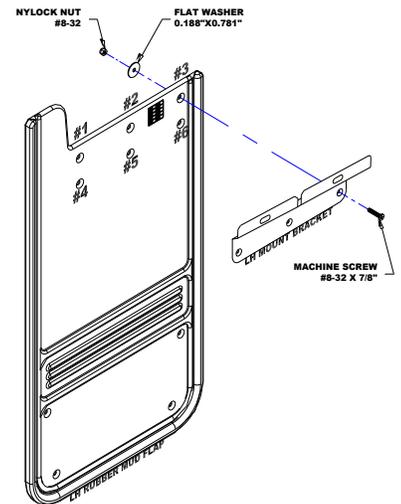

2. Drill a 1/4" hole (2 places) through the bracket Holes #7 and #8 through the factory plastic guard and fasten the holes #7 and #8 with 2 machine screws / half washers/ flat washers / lock washers and hex nuts. *See Diagram #2.*

✓ Check all fasteners for tightness. Repeat procedure on the passenger side.

