

21-C Ford Bronco Sport

Mud Flap Set, Front Mounting Diagram & Instructions

IMPORTANT:

Manufacturer is not responsible for negligent use of vehicle with mud flaps installed, including over-tightening of screws and bolts causing damage to vehicle or mud flaps.

TOOLS REQUIRED-





Push Pin Removal Tool





7/16" Open Wrench and Socket Wrench




and Socket Wrench

FLAPS AND BRACKETS







PARTS BAG # 769776

a) (6) Capscrew, Blk Oxid. SS,1/4-20UNC x 3/8" Part #014069



b) (2) Capscrew, Blk Oxid. SS, ¼"-20UNC x 1" Part #014073



c) (4) Screw, Sht Mtl #8-18 x 1" SS Part #016054



d) (2) Screw, Sht Mtl. #8-18 x 1" Blk Ox. Part #016055



e) (2) Washer, Flat, 0.281"x 1", SS, Blk Ox. Part #018069



f) (4) Washer, Offset 0.281" x 1.5", Blk Ox. Part #018087



g) (2) Washer, Flat 0.203 "x 1" Blk Ox. Part #018070



h) (2) Washer, Flat 0.203" x 1", SS Part #018031



i) (2) Washer, Half 0.203" x 1", SS Part #018032



j) (4) Washer, Flat 0.281" x 1", SS Part #018028



k) (2) Washer, Flat 0.281" x 1.5" Blk Ox. Part #018079 (?)



l) (4) Hex Nut ¼"-20, SS Part #025000



m) (4) Washer, lock ¹/₄ » Helicoil, SS Part #024000



n) (4) Washer, lock #18-8, 10 Helicoil, SS Part #024001



p) (8) Spring Nut '4"-20UNC, 0.84" Reach Part #028011



q) (2) Clip Short Part #769799










INSTALLATION (For ease of installation it is suggested that the wheel be removed)

- 1. Before you install your Mud Flap Set, see the diagram and parts list for all necessary parts.
- 2. On the underside of the vehicle, install the short clip (q) on the oblong factory hole #1 closest to the front of the vehicle, securing with a flat half washer (i), lock washer (n), and screw (c) and the long clip (r) on the oblong factory hole #2 closest to the back of the vehicle, using a flat washer (h), lock washer (n), and screw (c). (See Diagram 1)

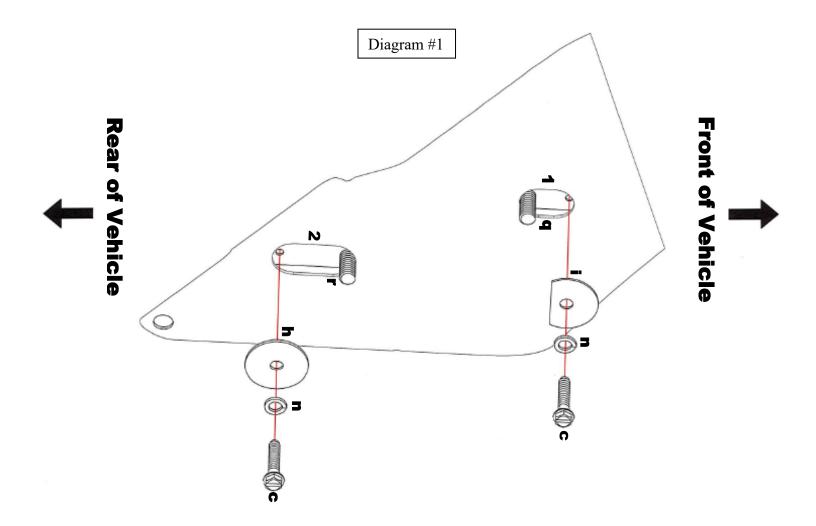


Note: If you would like to see how to install our custom clips, please see our YouTube Channel






3. Install the bracket through holes #3 & #4 to previously installed clips on holes #1 & #2, securing with a flat washer (j), lock washer (m), and hex nut (l). (See Diagram 2)

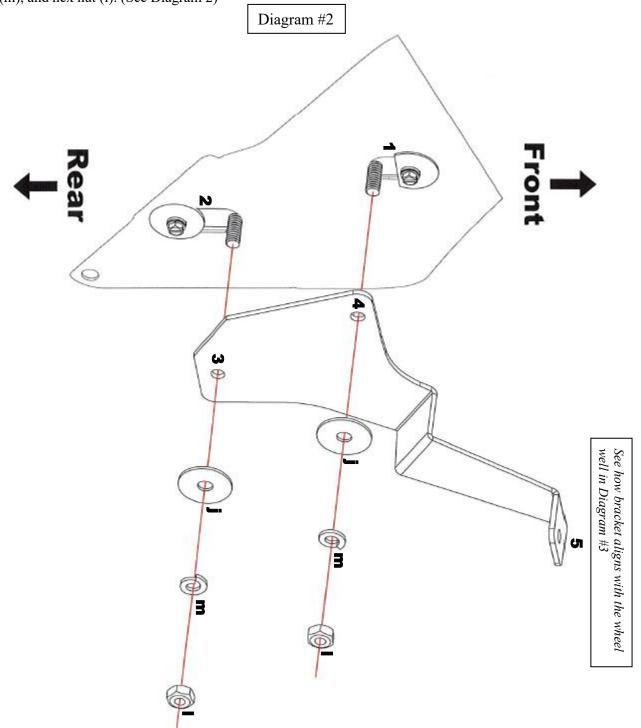



- 4. Remove the factory push pin from hole #6 and discard.
- 5. Install spring nut (n) on fender lip factory hole #6 with the extruding end facing in.
- 6. Loosely install mud flap through hole #8 to through spring nut (p) to factory hole #6 using an offset washer (f) and capscrew (b)
- 7. Line mud flap up with fender lip and mark fender lip with a pen through mud flap holes #9 to #11.
- 8. Install spring nuts (p) on fender lip on each marked position with the extruding end facing out.
- 9. Install mud flap hole #9 to spring nut (p) using an offset washer (f) and capscrew (a)
- 10. Install mud flap hole #10 to spring nut (p) using a flat washer (e) and cap screw (a)
- 11. Install mud flap hole #11 to spring nut (p) using a flat washer (k) and cap screw (a)
- 12. Install mud flap hole #7 to bracket hole #5 using a flat washer (g) and screw (d)

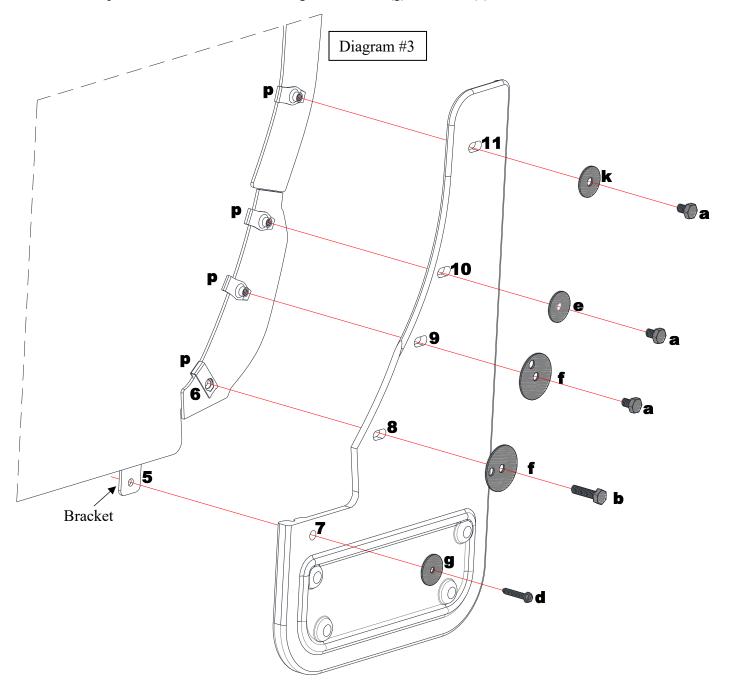

Please check out our YouTube channel to see an install video for this application.









Gatorback Mud Flaps by Truck Hardware Ltd. LIMITED WARRANTY

All Ford part numbers provided by Truck Hardware Ltd. are warranted to be free from defects in materials or workmanship on products properly installed per the installation instructions provided with the product. This warranty covers repair or replacement of any defective product at no charge during the applicable warranty period listed below. Labor for replacement or service of defective product is not paid or reimbursed by Truck Hardware Ltd.

WARRANTY PERIOD		
	USA	Outside USA
Product which appears on New Vehicle Monroney Label (window sticker)	Coverage which matches new vehicle warrantyFord - 3 years or 36,000 miles whichever comes first; Lincoln 4 years or 50,000 miles whichever comes first	Coverage which matches new vehicle warrantyFord - 3 years or 60,000 kilometers whichever comes first; Lincoln 4 years or 80,000 km whichever comes first
Part purchased and installed during or after the original vehicle warranty	Whichever of the following options provides the greater benefit to the customer: 1) 2 years / unlimited miles	Whichever of the following options provides the greater benefit to the customer: 1) 2 years / unlimited kilometers

This limited warranty does not cover any damage, defect or malfunction caused by misuse, abuse, accident, improper installation, modification or improper or lack of maintenance. Incidental and consequential damages are not recoverable under this warranty. This warranty offers you specific legal rights. You may have additional or other rights as which vary from state to state or province to province.

If you experience a warranty issue with this product please visit your Ford dealer. If the repair is covered by the warranty above and completed by the dealership, labor is also covered by Ford -- Ford Warranty and Policy – Section 3.

Please note that Truck Hardware Ltd. has replacement component parts available to assist consumers and dealers to resolve warranty and non-warranty issues as quickly as possible.

Note to dealer:

Ford dealers should contact Truck Hardware Ltd. by phone at 1-800-661-8208 and ask to speak to the warranty administrator or by email to: info@truckhardware.ca.